
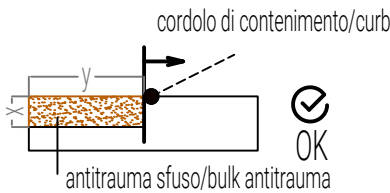



PIANTA ANTITRAUMA SFUSO/LOOSE ANTI-TRAUMA PLANT

 area libera da impedimenti minimo prato/terreno naturale/area free of impediments minimum meadow/natural terrain

 antitrauma sfuso spessore min. 30 cm. mq. 37.3/bulk anti-trauma min. thickness 30 cm. sq. m. 37.3

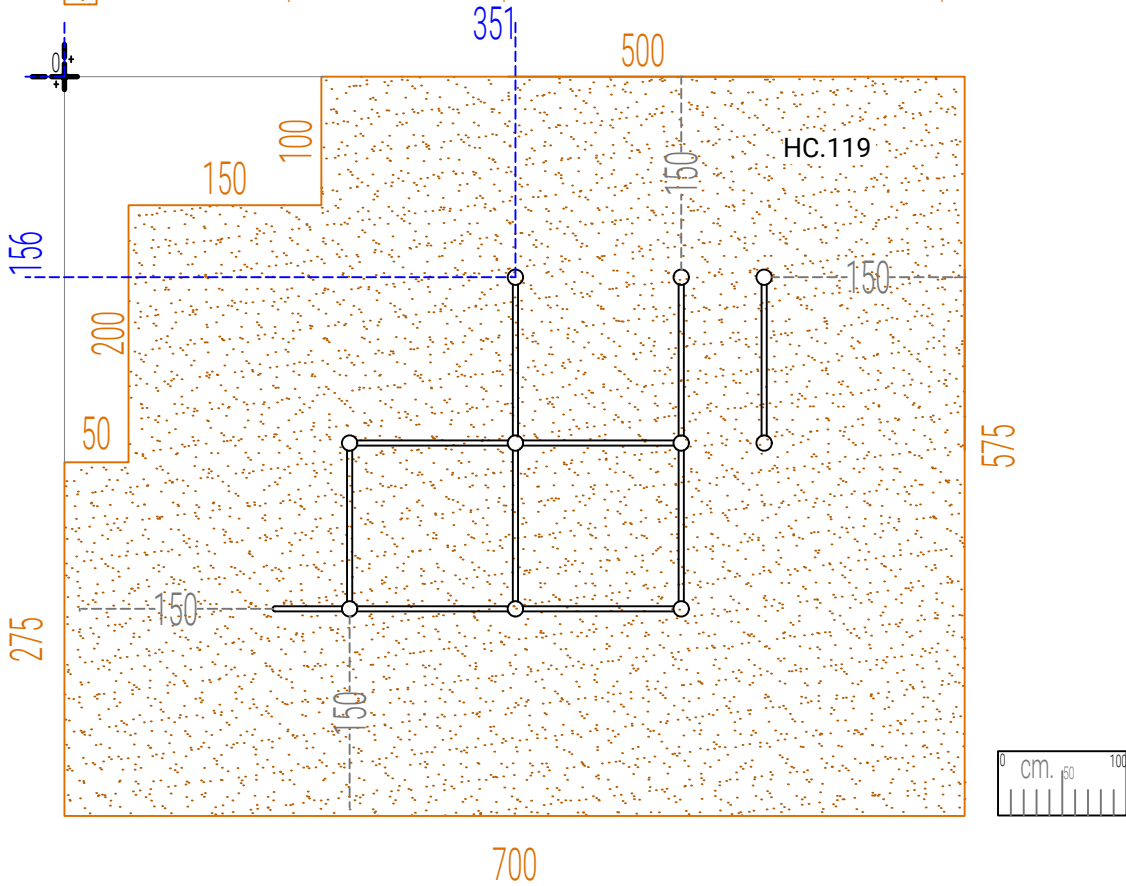

In caso di cordolo in Robinia non uniforme mantenerlo esternamente all'area di impatto/In case of non-uniform Robinia curb keep it outside the impact area.

! IN CASO DI ANTITRAUMA COLATO!/ IN THE CASE OF CAST RUBBER ANTITRAUMA:

L'applicazione del materiale antitrauma colato deve garantire uno spessore uniforme su tutta la superficie di impatto/Application of the poured anti-trauma material should ensure uniform thickness over the entire impact surface.

! Per approfondimenti consultare la scheda sul posizionamento dei cordoli dettagliata in allegato/See the detailed curb placement sheet attached for more details.

 Origine/Source

modifiche / amendments :				scala / scale :	-	misure espresse in / dimensions are established in : cm.		denom. / name :	
nr°	data/date	pos	descrizione/description	autore		toleranze generali applicate / general tolerances:		nr. dis. / draft nr. :	
01						● sezione/diametro legname impregnato 0.5 (cm) ±		Pianta Antitrauma Sfuso / Loose Safety Matting Plant	
02						● lunghezza legname impregnato 1% (on the total length) ±		-	
03						● lavorazione legname impregnato 0.2 (cm) ±		codice / code :	
04						● componenti in metallo 1 (mm) ±		xsp361	
						● componenti in materiali plastici 1.5 (mm) ±		luogo / place :	
						● sezione/diametro di treated wood 0.5 (cm) ±		Mezzolombardo (TN)	
						● length of treated wood 1% (on the total length) ±		data / date :	
						● processing on treated wood 0.2 (cm) ±		9/01/2025	
						● metal elements 1 (mm) ±		esecuzione/verifica/ approvazione :	
						● plastic elements 1.5 (mm) ±		created/checked/approved by :	